

General Information

Commonly used symbols on signs:

















PARKING




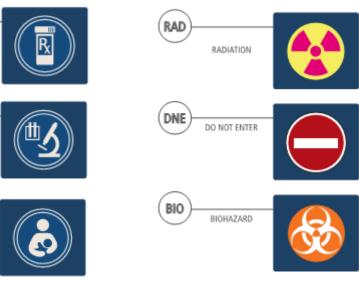

INTERIOR DESIGN INTENT DRAWINGS - condensed version 8.10.2018

COMMENTS ADDED 11-11-16



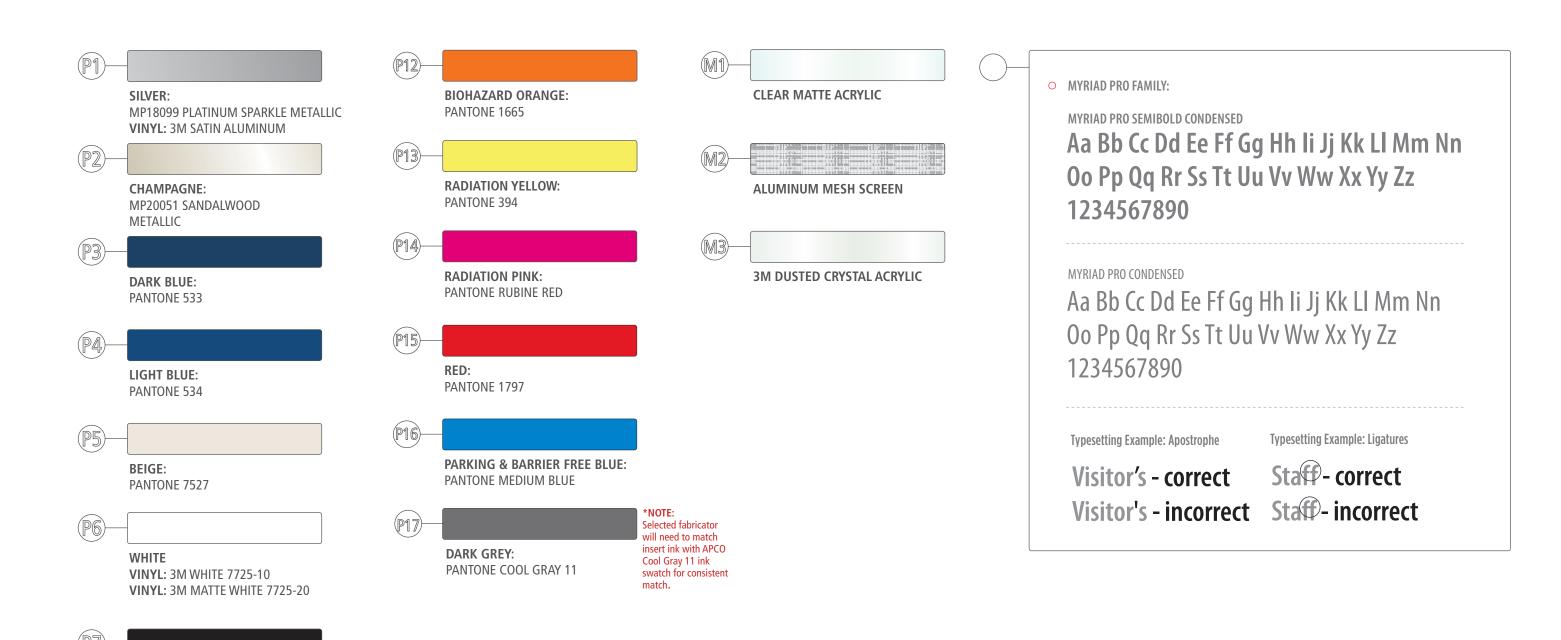

 Fabricator is responsible for matching all colors and materials as specified and is required to provide color and material samples for approval. CONSISTENT AND ACCURATE COLOR REPRODUCTION IN THIS DOCUMENT CANNOT BE ASSURED DUE TO THE LIMITATIONS OF COLOR PRINTING TECHNOLOGY.

BLACK

The Coated Pantone Matching System® and Matthews Paint system are used for specifying signage color matches. (In the absence of

actual sign material color chip reference sets, actual specified product color swatches should be referenced for color matching.)

Shown here are approximations of the signage background colors and supporting accent colors. Actual color finishes on signage are to be matte or low luster (not shiny or glossy) and exclusively a premium acrylic polyurethane.


The font used for this project was selected specifically for this project by the Designer and Owner.

It is the responsibility of the fabricator to purchase the fonts. Purchasing information can be obtained at the following websites: http://www.adobe.com/

No substitution of any other typefaces may be made. Under no circumstances are typefaces to be electronically distorted ("squeezed" or "extended") for purposes of fitting to the specified sign or general alteration of the sign face composition unless noted in the drawings. This includes (but is not limited to) stretching, squeezing, tilting, outlining or shadowing.

COLOR & TYPOGRAPHY

STANDARDS MANUAL FOR WAYFINDING SIGNAGE

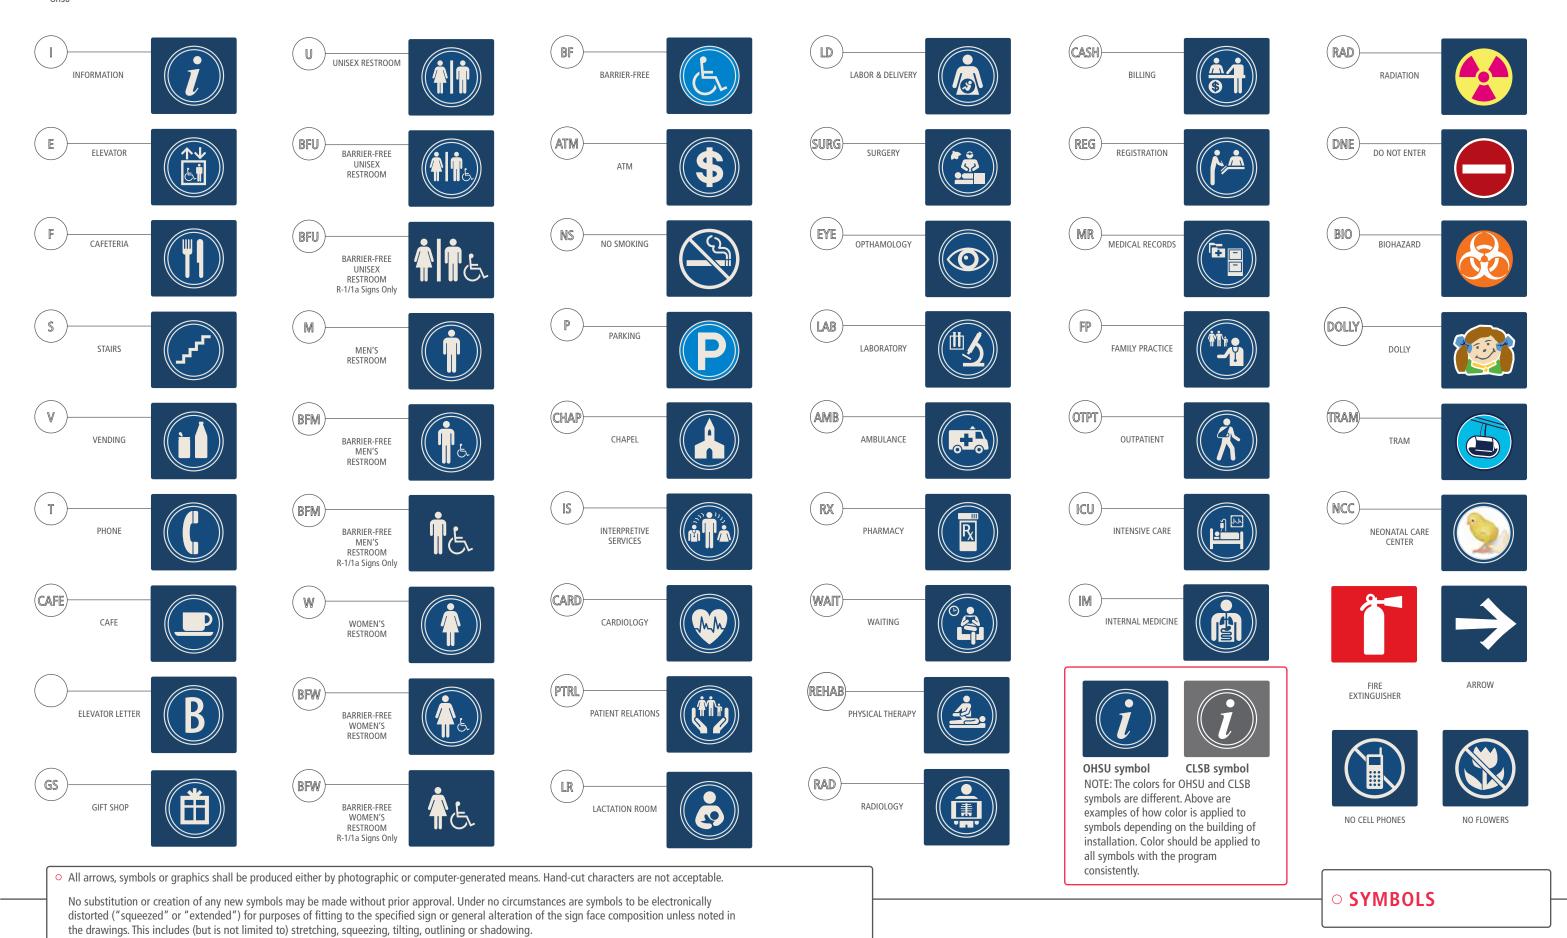

STANDARDS MANUAL FOR WAYFINDING SIGNAGE



ADA states that tactile room identification signs shall be installed on the latch side of the door (Illustration 1A). In the case of a double door, the sign shall be installed on the inactive leaf of the door (Illustration 1B). If both doors are active, then the sign is installed to the right of the right hand door. If there is no space on the latch side of the door, or to the right side of the double doors, then the sign is to be installed on the nearest adjacent wall space (Illustration 1C).

ILLUSTRATION 1A






ILLUSTRATION 1C




Signs with tactile characters may be installed on the push side of a door (doors that open into the room, not into the circulation space), so long as the door has a closer and is not on a hold-open device. For example, restroom doors that push open into the restroom, and the door automatically closes, may have the tactile identification sign installed on the door. (Illustration 2)

ILLUSTRATION 2




Note that tactile signs must be installed such that a clear floor space of 18 inches by 18 inches, centered on the tactile copy, is provided outside of the swing of a door. (Illustration 3A and 3B)

ILLUSTRATION 3A



CUBICAL ID

ILLUSTRATION 3B



ADA requires that tactile characters on a sign must be mounted between 48" and 60" from the tactile character baseline to the floor. Mounting most wayfinding signs at 60" to the center of the sign is the optimal location for the average user to read and distinguish each sign

In the case where the door swings toward the visitor, signs must be installed a minimum of 9" from the center of the tactile message to the edge of the door. If the sign is more than 10" wide, install the sign a standard distance of 4" from the door frame, assuming that the 18" clear space is still met.

9" from center of 9" from center of sign to edge of door 9" from center of sign to edge of door sign to edge of door STAIR 1 ROOF ACCESS Ŷ&. I-1 PRIMARY I-1a PRIMARY I-1b PRIMARY I-1b PRIMARY I-2/a SECONDARY ID I-3/4 GENERAL & I-5/6 UTILITY & R-1/a REGULATORY

PATIENT ROOM ID

(Simplfied) NOTE: The Mounting Guideline pages are provided as a reference only. These guidelines are an interpretation of the 2010 ADA Standards for Accessible Design, and are not to be construed as legal advice concerning compliance with any law or regulation.

IDENTIFIER

IDENTIFIER

(w/insert Simplfied)

OHANGING GUIDELINES


R-2 REGULATORY STAIR

IDENTIFIER

IDENTIFIER

(w/Slider)



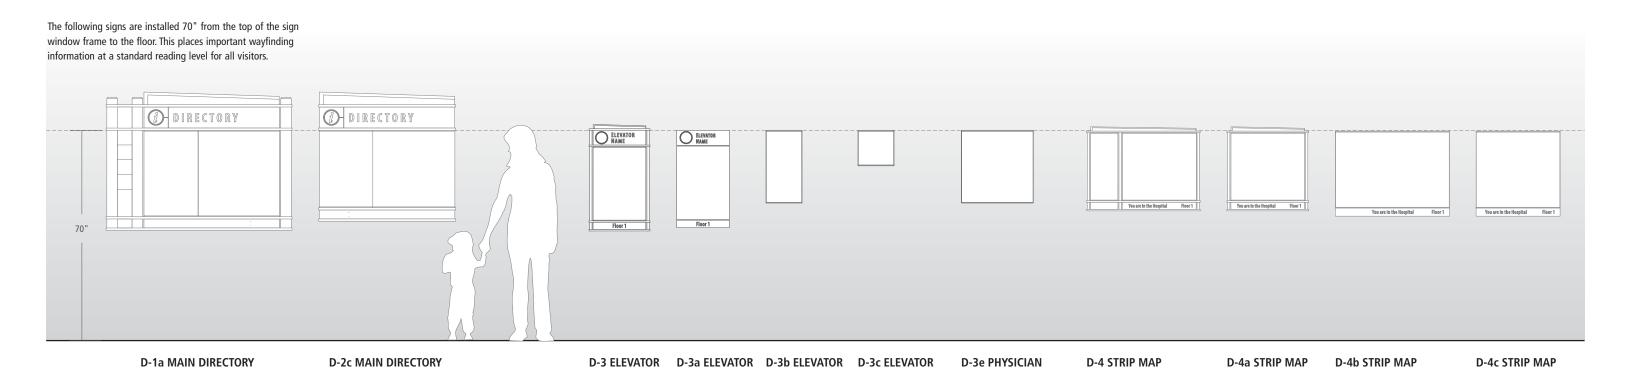

DIRECTORY

(Inside Cab)

DIRECTORY

(Inside Cab)

DIRECTORY

(w/Guide Info)

DIRECTORY

DIRECTORY

(Simplified)

70°

NOTE: The Mounting Guideline pages are provided as a reference only. These guidelines are an interpretation of the 2010 ADA Standards for Accessible Design, and are not to be construed as legal advice concerning compliance with any law or regulation.

G-1/a/b GUIDE SIGN

LARGE, MEDIUM, SMALL

(Simplified)

OHANGING GUIDELINES

(w/Guide Info,

Simplified)

(Simplfied)

STANDARDS MANUAL FOR WAYFINDING SIGNAGE

G-2/a/b GUIDE SIGN

(Simplified)

LARGE, MEDIUM, SMALL